
PNEUMATIC STUNNER Model USSS-1



The Jarvis Model USSS-1 - pneumatically operated high speed captive bolt stunner for cattle.

- Renders stunned animal insensible to pain.
- One shot humane stunning procedure. Fires only once no multiple firing.
- Better stunning for improved meat quality.
- Air operated with no air injection.
- Two hand control for safer operation.
- Easy to handle and safe to operate low recoil or kick back less operator fatigue.
- Easy to repair and clean.
- Light weight tool only weights 32.4 pounds (14.7 kg).

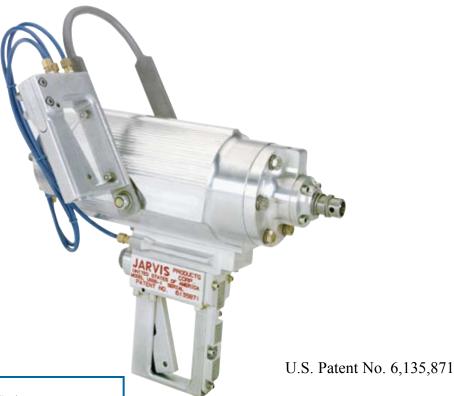

PNEUMATIC STUNNER Model USSS-1

Specifications		
Drive		Pneumatic
Model USSS-1 Operating Pressure (maximum)	160 - 190 psi	11 - 13.1 bar
Air Consumption (per cycle)	1.45ft ³	41 L
Penetrating Shaft Diameter Control Handles	0.625 in	15.9 mm
Dual Triggers		Pneumatic
Overall Dimensions (I x w x h)	19 x 5.5 x 15 in 14	83 x 140 x 381 mm
Weight	32.4 lbs	14.7 kg

Equipment Selection and Accessories	Order Number	
Model USSS-1		
side handle for use in knocker box	4044004	
Rear handle for use in "V" or center track restrainer	4044005	
rear handle for use in knocker box	4044013	
Air Compressor		
460 V / 60 Hz / 5 hp	4061361	
415 V / 50 Hz / 5 hp	4061378	
400 V / 50 Hz / 5 hp	4061362	
Model AST-101 Pneumatic Stunner Tester (includes test stand and control box)		
115 V, 60 Hz	4016004	
230 V, 50 / 60 Hz	4016005	
Air Filter-Regulator-Lubricator (64 oz / 1.9 L Capacity)	3022100	
Air Hose Assembly (coiled, 25 ft)	3059045	
Balancer	4042046	

